



**DUKERS**  
Quality Commercial Refrigeration



## REACH IN REFRIGERATOR

D28AR-GS1

Top Mounted / Glass Door



### TECHNICAL SPECIFICATIONS

Voltage/Frequency

115V/60Hz

Refrigerant

R290

Type of Defrost

Automatic

Interior Material

Stainless Steel

Exterior Material

Stainless Steel

Temperature Range °F

33 ~ 41°F

Compressor Power (HP)

1/5

Nema Config.

NEMA5-15P



### PRODUCT FEATURES



The compressor is mounted in the top and placed in the coolest possible area; this makes it easily accessible for servicing.



Digital temperature controls with LED display for precise adjustment and automatic defrosting system.



Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit



Hinged glass doors, tempered glass, UV blocking.



R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.



Epoxy coated wire shelves.



Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.



High quality coated stainless adjustable shelves prevent peel and rust.



Lifetime warranty on hinges.



Adjustable front locking casters.




**HIGH QUALITY  
STAINLESS STEEL &  
ROBUST DESIGN**


# DETAILS & SPECIFICATIONS

## D28AR-GS1

Front View

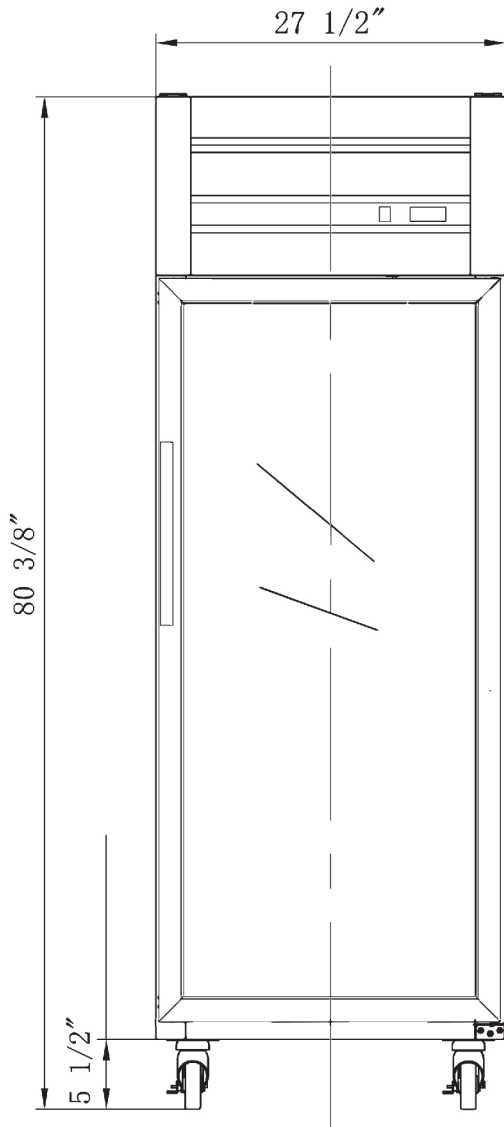

Side View

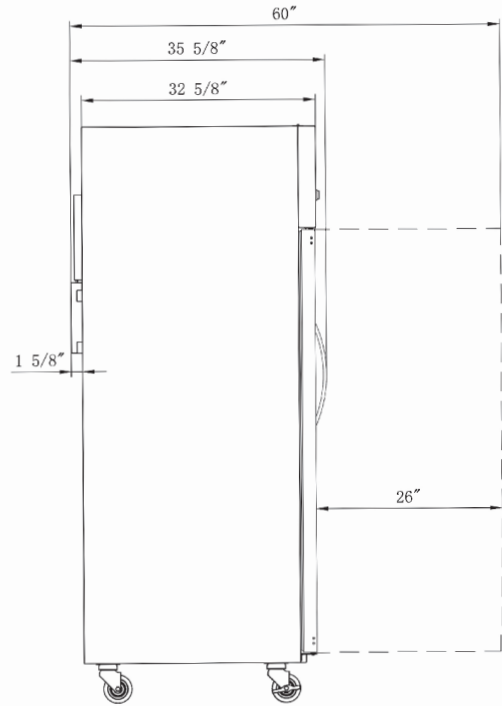

### MODEL D28AR-GS1

Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	260W
Total Current	3.1A
Total Capacity	18.31 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290/3.17 oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
D28AR-GS1	27 1/2 x 35 5/8 x 80 3/8	29 1/2 x 36 5/8 x 82 3/8	294 lbs	4	39



AutoQuotes



115/60/1  
NEMA-5-15P